




60W Far Red LED Bar

2.3 $\mu\text{mol/J}$
Fixture Efficiency

138 $\mu\text{mol/s}$
Total Output

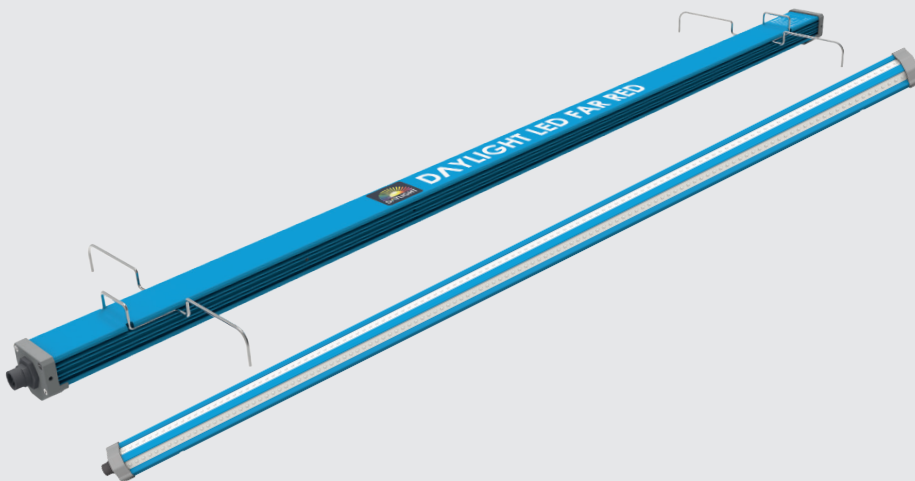

More flower, less power

Fine tune your light spectrum with the DAYLIGHT 60W Far-Red supplemental bar. Easily attach to existing DAYLIGHT 480W & 660W LED fixtures using the included brackets, or hang independently for truly customisable lighting options. With a $2.3\mu\text{mol/J}$ efficiency and 60W of output power, the DAYLIGHT 60W Far-Red LED is a no brainer for any discerning grower.



2 x 60W Far-Red Bars attached to DAYLIGHT 660W PRO Fixture

DAYLIGHT LED 60W Far Red | Key features

- ✓ 60W Far Red LED
- ✓ Osram LED red chips
- ✓ Attach to DAYLIGHT LED lighting fixtures(480W/660W) or use independently
- ✓ Plug and play: Internal LED Driver
- ✓ Cool running
- ✓ Energy efficient, low heat output
- ✓ No fans or moving parts, silent running
- ✓ 30'000 hour lifespan
- ✓ Easy to use hanging brackets
- ✓ Lightweight slimline design
- ✓ IP65 ingress protection
- ✓ Dimensions: 1131.5 x 46.2 x 40.3 mm

Includes hanging brackets

(Excluding the 1030W model)

Attaches easily to DAYLIGHT 480W & 660W fixtures

(Excluding the 2019 8 bar model)

Can be used independently





60W Far Red LED Bar

Efficiency Data


PPF ($\mu\text{mol/s}$) (Tested at 22°C)	Fixture efficiency using input power (60W) ($\mu\text{mol/J}$)	Fixture efficiency using LED power (52W) ($\mu\text{mol/J}$)	FAR RED LED chip efficiency ($\mu\text{mol/J}$)
138	2.3	2.7	2.46

Product Data

Product Code	Dimensions (mm)	Net Weight (kg)	Gross Weight (kg)	Input Current (A)	Input Power (W)
MBDLLED60FR	1131.5 x 46.2 x 40.3	1.36	2.36	0.29	60W

Supply Voltage (V)	Supply Frequency (Hz)	Power Factor	IP Rating	Life Span (hours)	Light Angle (°)	Working Temperature (°C)
230	50/60	≥ 0.95	IP65	>30000	140°	0 to 40

Graphs & Charts

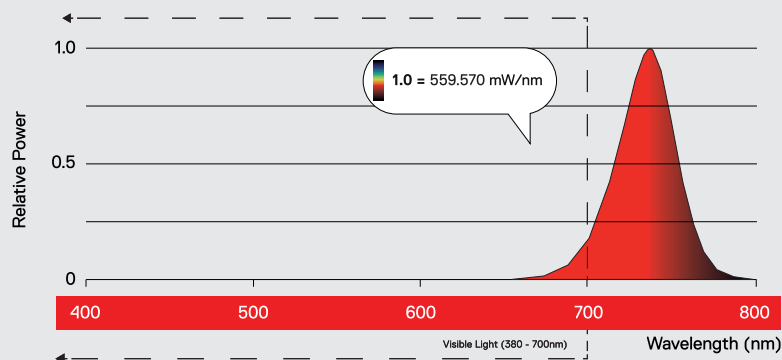

Discover the full DAYLIGHT LED Range:

www.growwithdaylight.co.uk

60W (Far Red, UVA, UVA and B), 100W, 200W, 200W PRO, 300W, 300W PRO
480W, 480W PRO, 660W, 660W PRO, 1030W & 1030W PRO